

Storage water heater 5 litres S5-U



Application areas

Single point supply:

> Kitchen sink




> Washbasin



Storage water heater 5 litres S5-U



Product information

Energy efficiency class A (Scale: A+ to F)		 
Energy efficiency class A (Scale: A+ to F)		S5-U (undersink model)
Part number:	4100-42052	
Content [litres]:	5	
Type:	vented	
Water connections (thread connections):	G $\frac{3}{8}$ "	
Temperature range [°C]:	approx. 35 – 85	
approx. mixed water amount 40 °C at 65 °C ¹⁾ [litres]:	9.1	
Nominal power rating (kW):	2.0	
Supply voltage [V]:	1~ / N / PE 230 V AC	
Heating time $\Delta t = 55 \text{ K}$ ²⁾ [min]:	10	
Standby power consumption at 65 °C [kWh / 24h]:	0.27	
Internal tank:	plastic	
Function indicator:	✓	
Temperature limit adjustable to ... [°C]:	38 / 55 / 65	
Protection class:	IP 24	
Dimensions (height × width × depth) [cm]:	37.6 × 25.6 × 22.8	
Power cable:	 with plug	
approx. weight filled with water [kg]:	8.5	

1) At an inlet temperature of 12 °C 2) Temperature increase e.g. from 10 °C to 65 °C

Description

- > Vented 5-litre storage water heater (undersink model) for hot water supply at a single point-of-use
- > Temperature control approx. 35 °C bis 85 °C with available energy-saver range and optional temperature limitation at 38 °C, 55 °C or 65 °C
- > Can only be used with a special open-outlet tap for vented hot water heaters
- > Safety temperature limiter as dry-run protection
- > Internal tank of polypropylene with recyclable, thermal insulation
- > High-quality insulation keeps heat losses at a minimum
- > Automatic frost protection
- > Power cable with plug, length: ≤ 65 cm


Storage water heater 5 litres S5-U Installation




Example of an **open-outlet** installation

Measurements in mm

Assembly and operating instructions must be observed upon installation.

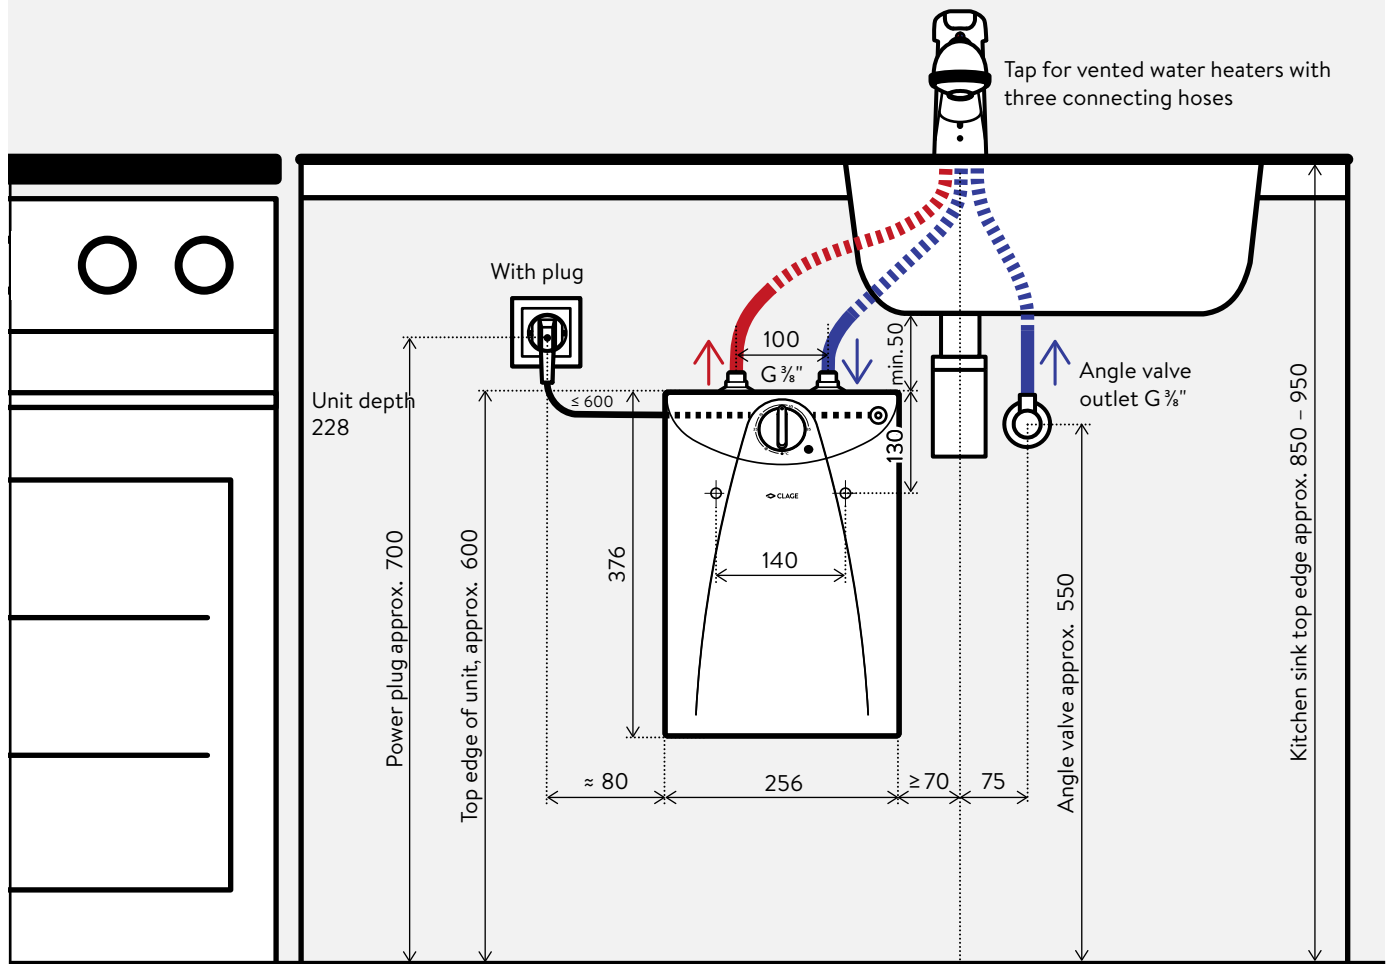

Side view:

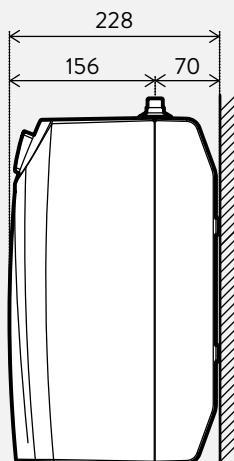

Storage water heater 5 litres S5-U Accessories



EKA (optional)

Single-lever mixer tap with pull-out rinse sprayer and flexible connecting hoses, spout 20 cm

EKA: Part no. 1100-04230



SNT (optional)

Two-handle temperature control mixer tap for open-outlet installation, temperature selection on the left, water volume adjustment on the right, with swivel spout 15.5 cm

SNT: Part no. 4100-0210



Aerators (optional)

Aerator insert for tap adapter M22/24 at the tap

CSS: Part no. 0010-00504



Aerator with chrome tap adapter M22i (suitable for taps with male threads at the outlet)

CSSi: Part no. 89125